

HANDHELD REAL-TIME SPECTRUM ANALYZER

PXE SERIES
9.5/20 GHz

Key facts

Portable makes possible

1.5 kg lightweight, 10.1-inch multi touchscreen

Frequency range: 9 kHz to 9.5/20 GHz

1 GHz DANL: -168 dBm/Hz

1 GHz phase noise: -100 dBc/Hz@10 kHz


Analysis Bandwidth: up to 100 MHz

Channel power, phase noise and more


3 hours operation time, external power bank supported

Applications


Standard spectrum sweep

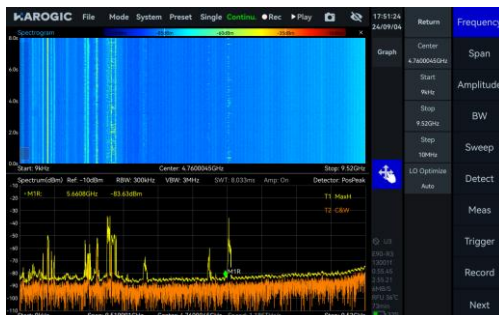


IQ streaming and analysis

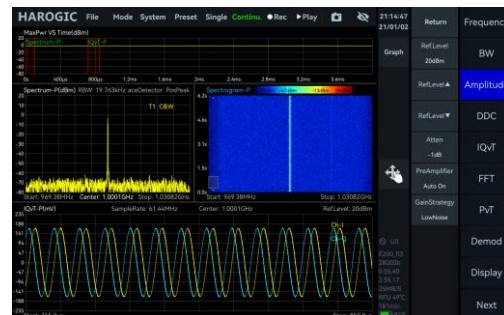

Power vs time measurement

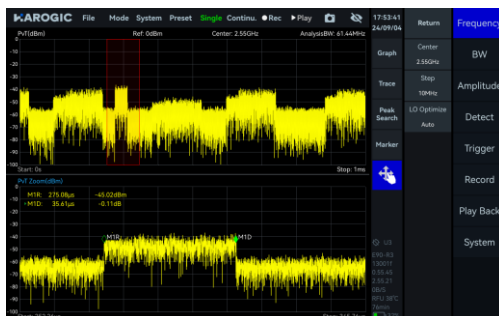


Real-time analysis

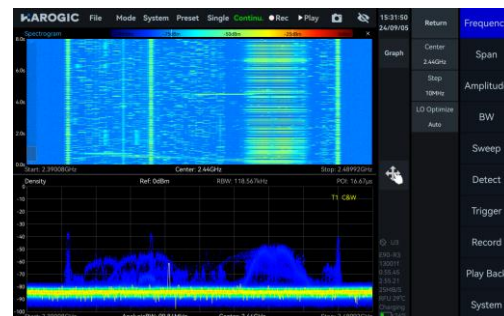


Applications


Channel power/ACPR

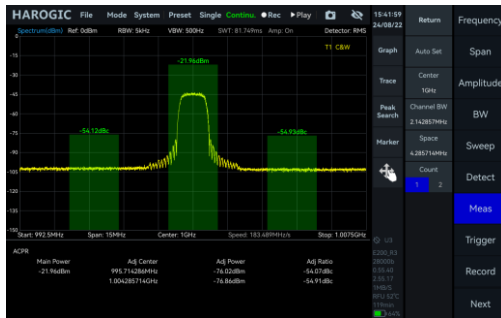


Phase noise

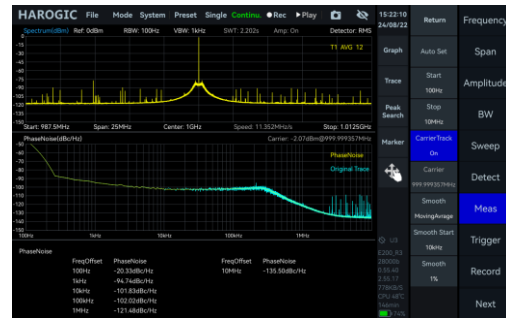

Frequency tracking

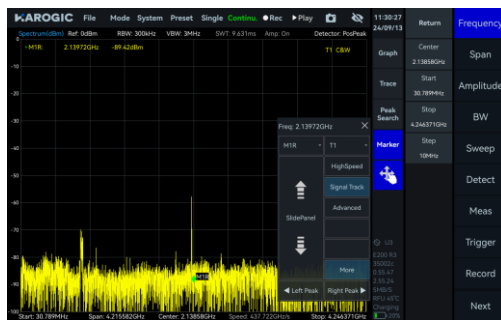


Pulse signal measure

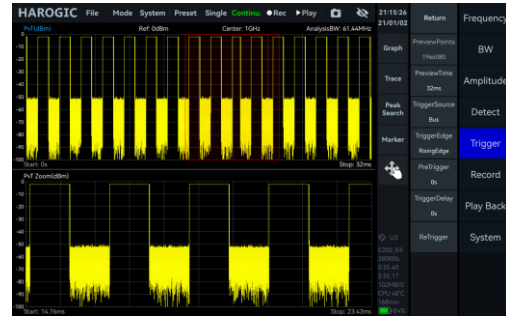

AM/FM demodulation



Basic digital demodulation (Beta)

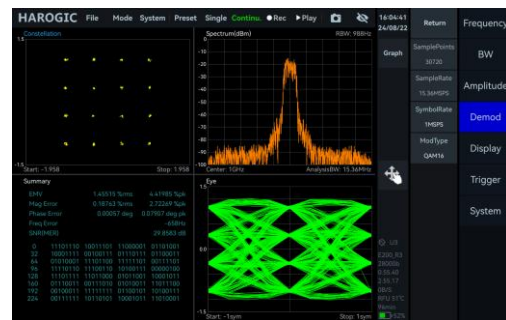

Specifications*

FREQUENCY

Frequency range	PXE-90	PXE-200
		9 kHz-9.5 GHz
Reference clock	Internal or external	
Frequency accuracy	TCXO (std.)	<1 ppm, manual correction is available
	OCXO (opt01)	<1 ppm, manual correction is available
Aging and temperature stability	TCXO (std.)	<1 ppm/year, <1 ppm
	OCXO (opt01)	<1 ppm/year, <0.15 ppm

SPECTRUM PURITY

SSB phase noise (dBc/Hz)

	PXE-90		PXE-200	
	1 GHz	9.5 GHz	1 GHz	20 GHz
Carrier frequency	1 GHz	9.5 GHz	1 GHz	20 GHz
1 kHz	-95.2	-91.5	-91.2	-80.6
10 kHz	-101.6	-98.5	-99.7	-90.6
100 kHz	-100.6	-99.7	-101.1	-96.2
1 MHz	-120.9	-116.2	-121.6	-111.5

Residual response (dBm)

spur reject = bypass

RBW =1 kHz

PosPeak detector

Reference level (R.L.)	PXE-90		PXE-200	
	0 dBm	-50 dBm	0 dBm	-50 dBm
9 kHz-1 GHz	-83	-120	-90	-120
1 GHz-3 GHz	-83	-120	-80	-120
3 GHz-9.5/20 GHz	-90	-130	-90	-120

Image rejection

	PXE-90	PXE-200
9 kHz-3 GHz	> 90 dBc (typ.)	> 90 dBc (typ.)
3 GHz-9.5 GHz	> 90 dBc(typ.) for spur reject = enhanced; > 60 dBc (typ.) for spur reject = bypass	> 90 dBc (typ.)

9.5 GHz-20 GHz	-	> 90 dBc(typ.) for spur reject = enhanced; > 60 dBc (typ.) for spur reject = bypass
----------------	---	---

IF rejection	> 90 dBc (typ.) for spur reject = enhanced; > 80 dBc (typ.) for spur reject = bypass
--------------	---

Local oscillator related spurious	<-65 dBc Center frequency $\pm (N/M)*100$ MHz, N,M = 1,2,3,4,5...
-----------------------------------	--

IIP3 / IIP2 (dBm)	PXE-90		PXE-200	
	1 GHz	9.5 GHz	1 GHz	20 GHz
Carrier frequency	1 GHz	9.5 GHz	1 GHz	20 GHz
R.L. = 20 dBm	46.1 / 83.2	40.5 / 92.8	45.5 / 82.6	35.3 / 93.6
R.L. = 0 dBm	26.7 / 85.0	19.2 / 90.3	25.5 / 81.1	21.0 / 89.0
R.L. = -20 dBm	10.5 / 82.2	2.0 / 49.3	7.9 / 81.5	-4.5 / 55.3

AMPLITUDE

Max. input power (CW)	23 dBm 10 dBm	90 MHz-9.5/20 GHz and the preamplifier is off 9 kHz-90 MHz or preamplifier is on
Max. DC voltage	± 10 VDC	
Display range	DANL-23 dBm	
Amplitude accuracy	9 kHz-9.5 GHz 9.5 GHz-20 GHz	± 2.0 dB ± 3.0 dB
IF in-band flatness	± 2.0 dB	
Reference level (R.L.)	-50 dBm-23 dBm	
RF preamplifiers	automatically turn on or forcibly turn off	
VSWR	<2.0:1	
90 MHz to Max.Freq.		

Display average noise level
(DANL) (dBm/Hz)
RBW=10 kHz

Reference level	PXE-90		PXE-200	
	-20 dBm	-50 dBm	-20 dBm	-50 dBm
9 kHz	-136.9	-142.4	-141.2	-152.3

100 kHz - 90 MHz	-146.3	-150.9	-152.2	-160.2
90 MHz - 3.0 GHz	-145.7	-165.1	-147.2	-165.3
3.0 GHz - 9.5 GHz	-148.9	-157.4	-139.1	-157.1
9.5 GHz - 20 GHz	-	-	-138.2	-159.5

STANDARD SPECTRUM ANALYSIS

Detector	PosPeak, NegPeak, Sample, Average, RMS, MaxPower
RBW	1 Hz-10 MHz
VBW	1 Hz-10 MHz
Data chart	SASudio4 software provides spectrum, waterfall chart, and historical trace
Measurements	Channel power, OBW, X dB bandwidth, Adjacent channel power ratio, IM3

Sweep speed	PXE-90	PXE-200
RBW ≥ 1 MHz FPGA spur reject = bypass	about 830 GHz/s	about 890 GHz/s
RBW = 250 kHz FPGA spur reject = standard	about 570 GHz/s	about 590 GHz/s
RBW = 30 kHz FPGA spur reject = bypass	about 150 GHz/s	about 150 GHz/s
RBW = 1 kHz CPU spur reject = bypass	about 2.8 GHz/s	about 2.7 GHz/s

IQ RECORDING

Burst recording bandwidth	Maximum: 100 MHz The built-in memory depth is 128 Mbytes
Continuous recording bandwidth	Maximum: 25 MHz Limited by the bandwidth of USB interface and hard disk. The storage depth is limited by the hard disk capacity
IQ sample rate	125MSPS, decimate factor: 1,2,4,8,32,64,128,256,512,1024,2048,4096 supported (FPGA)
External trigger response	Maximum response frequency 500 times/sec

DETECTION ANALYSIS/ZERO SPAN

Lowest time resolution	8 ns
Max. analysis bandwidth	100 MHz
Detector	PosPeak, NegPeak, Sample, Average, RMS, MaxPower

REAL TIME SPECTRUM ANALYSIS

FFT analysis	FFT engine is implemented in FPGA. Frame compression and trace detection are supported. No missing samples between FFT frames		
	FFT frame update rate= 10^9 ns/(N * D * 8 ns); POI = N * D * 8 ns N for FFT points (2048,1024,512,256,128,64,32) D for decimate factor (1, 2, 4, 8...)		
	Typical settings	FFT refresh rate	POI
	N = 2048, D = 1	61,035 times/sec	16.384 us
	N = 32, D = 1	3,906,250 times/sec	0.256 us
Max. analysis bandwidth	100 MHz		
Window function	B-Nuttall, Flat-top, LowSideLobe		
RBW	14.73 MHz-3.59 kHz (Flat-top) 7.81 MHz-1.90 kHz (B-Nuttall) 13 grades for each window type		
Amplitude resolution	0.75 dB		

GENERAL

Input and output	
Power supply	USB PD (20 V)
Data interface	USB3.0 Type-C * 1, USB2.0 Type-C * 1, USB2.0 Type-A * 1
Video and audio interface	Micro HDMI * 1 (support for extended display), 3.5mm headphone port * 1
RF input	N (F), Input impedance 50 Ω
Reference input	MMCX (F), amplitude ≥ 1.5 Vpp, input impedance is about 300 Ω
Reference output	Integrated in MUXIO, 3.3 V CMOS, programmable on/off
External trigger input	Integrated in MUXIO, 3.3 V CMOS, input: high impedance
External trigger output	Integrated in MUXIO, 3.3 V CMOS
Analog IF output	MMCX (F), maximum output power – 25 dBm, output impedance 50 Ω supported, 307.2 MHz \pm 50 MHz

Display	IPS LCD 1280×800, 10.1-inch multi-touch screen	
EMMC storage	16 GB	
Power consumption	Typical 25 W	
Size (D * W * H) and weight	260 mm×180 mm×50 mm and about 1.5 kg	
GNSS synchronization	GNSS (only support external antenna)	+/- 100 ns
Operating temperature (ambient)	0-50 °C	
Storage temperature (ambient)	-20-70°C	
Packaging and accessories	spectrum analyzer with protective shell * 1, power adapter * 1, power cable * 1, calibration certificate*1	

*Specification applies under the following conditions:

- (1) Start up and warm up for 10 minutes
- (2) Ambient temperature 25 °C (core temperature 50 °C)
- (3) Stand spectrum analysis mode-spurious rejection enhance on.
- (4) Necessary heat dissipation is provided to ensure the ambient and core temperature within the rated range at the same time

OPTIONS

Code		
01	Built-in OCXO reference clock	built-in hardware
34	External omnidirectional antenna, 400-8000MHz, Gain<2dBi	accessory
71	Basic digital modulation analysis	software
72	Pulse signal measurement	software

 www.harogic.com

 info@harogic.com